

ABSOLUTE PRESSURE TRANSMITTER

EDF "Not Classified" version

DATA SHEET

FKA ...L

The FCX-All absolute pressure transmitter accurately measures absolute pressure and transmits a proportional 4 to 20mA signal.

The transmitter utilizes a unique micro-machined capacitive silicon sensor with state-of-the-art microprocessor technology to provide exceptional performance and functionality.

FEATURES

1. High accuracy

0.2% accuracy is a standard feature. Fuji's micro-capacitance silicon sensor assures this accuracy for all suppressed calibration ranges without additional adjustment.

0,1% accuracy is available as option.

2. Minimum environmental influence

The "Advanced Floating Cell" design, which protects the pressure sensor against changes in temperature and overpressure substantially, reduces total measurement error in actual field applications.

3. Fuji/HART® bilingual communication protocol

FCX-All series transmitter offers bilingual communication to speak both Fuji proprietary protocol and HART®. Any HART® compatible devices can communicate with FCX-All.

4. Application flexibility

Various options that render the FCX-All suitable for almost any process applications include :

- Analog indicator at either the electronics side or terminal side.
- Full range of hazardous area approvals.
- Built-in RFI filter and lightning arrester.
- 5 digits LCD meter with engineering unit.
- Stainless steel electronics housing.
- Wide selection of materials.

5. Programmable output Linearisation Function

In addition to linear, output signal is freely programmable.

6. Burnout current flexibility

(Under Scale : 3.2 to 4.0mA, Over Scale : 20.0 to 22.5mA)

Burnout signal level is adjustable using Hand Held Communicator (Fuji FXW) to comply with NAMUR NE43.

7. Dry calibration without reference pressure

Thanks to the best combination of unique construction of mechanical parts (sensor unit) and high performance electronics circuit (electronics unit), reliability of dry calibration without reference pressure is at equal level as wet calibration.



Functional specifications

Type :

FKA : SMART, 4-20mA cc + Fuji /HART® digital signal

Service :

Liquid, gas or vapour

Span, range and overrange limit :

Modèle	Span limit [kPa abs] {bar abs}		Range limit [kPa abs] {bar abs}	Overrange limit [MPa] {bar}
	Min.	Max.		
FKA□01	1.6 {0.016}	16 {0.16}	0 to +16 {0 à +0.16}	0.5 {5}
FKA□02	1.6 {0.016}	130 {1.3}	0 to +130 {0 à +1.3}	0.5 {5}
FKA□03	5 {0.05}	500 {5}	0 to +500 {0 à +5}	1.5 {15}
FKA□04	30 {0.3}	3000 {30}	0 to +3000 {0 à +30}	9 {90}

Remark:

To minimize environmental influence, span should be greater than 1/25 of the max. span in most applications.

Output signal :

4 to 20mA DC with Fuji /HART® digital signal superimposed on the 4 to 20mA signal.

Power supply :

Transmitter operates on 10,5V to 53V DC at transmitter terminals.

Load limitations :

Mini = 0Ω without digital communication
 = 250 Ω mini for digital communication (Fuji or HART® protocols)
 Maxi (Ω) = (V power supply - 10,5) / 0,0225 for default settings
 Maxi (Ω) = (V power supply - 10,5) / (Imax +0,9) x 1000 for user settings, where Imax (mA) is the highest of the following values :

- Either the max output signal in case of electronics failure (Burnout), when OVER SCALE Burnout is selected
- Or the max output process signal in case saturation over 20mA, when "SATURATE CUR" is selected to "SAT HI"

For details, see FCXAll or FXW Hand Held Communicator manuals.
 Note : Above values are applicable for electronics from version 4FA (software 4.06), which includes K3A qualified models.

Hazardous locations :

Designed to meet international intrinsic safety and flameproof (explosionproof) standards.
 Please consult the code symbols some pages further on, to know the different types of approvals.
 Consult Fuji Electric for status.

Zero/span adjustment :

Zero and span are adjustable by the FXW communicator. Local adjustment of zero and span are possible from outside screw on the electronics housing.

Damping :

Additional damping of the output signal is adjustable between 0,12 and 32 sec with the FXW communicator, and/or with the optional LCD indicator.

Zero elevation/suppression :

Adjustable with the FXW communicator or with the external screw on the electronics housing between 0 kPa abs to +100% of URL.

Normal/reverse action :

Programmable with the FXW communicator.

Indication :

A plug-in analog indicator (accuracy 1,5%) can be mounted on the electronics unit or the terminal block. The local LCD indicator (5 digits) is assembled on the electronics unit.
 Additional local adjustment facilities are possible by the integrated switches in the LCD indicator :

- "Local/comm" switch gives the possibilities to make local adjustments of zero/span, damping or to configure the transmitter with the FXW communicator.
- The "mode" switch with 7 positions gives local adjustment possibilities for zero/span, 4/20mA, enable or inhibit the local adjustments.
- Local damping adjustment is possible via the "damp" switch.

Burnout direction : (selected from the FXW communicator)

If self-diagnostic detect transmitter failure, the analog signal will be driven to either "Output Hold", "Output Overscale" or "Output Underscale" modes.
 "Output Hold" :
 Output signal is hold at the value just before failure happens.

"Output Overscale" :

Adjustable within the range 20.0 mA to 22.5 mA from the FXW communicator.

"Output Underscale" :

Adjustable within the range 3.2 mA to 4.0 mA from the FXW communicator.

Loop-check output :

Transmitter can be configured to provide constant signal of 3.8mA to 21.6mA by the FXW communicator.

Temperature limit :

Ambient :
 -25 to +60°C
 -20 to +60°C (optional LCD indicator)
 For explosionproof units (flameproof or intrinsic safety), ambient temperature must be within the limits specified by each standard.
 Process :
 -40 to +85°C (silicone oil)
 Storage :
 -40 to +90°C

Humidity limit :

0 to 100% RH (electronics housing closed and sealed)

Communication :

With HHC⁽¹⁾ (Model FXW, consult datasheet EDS8-47), following items can be remotely displayed or configured.

Note: HHC's version must be higher than 7.0 (or FXW □□□□1-□4), for FCX-All for supporting these items : "Saturate current", "Write protect", and "History".

Items	Fuji Protocol with FXW		Hart® Protocol	
	Display	Set	Display	Set
Tag No.	✓	✓	✓	✓
Model No.	✓	✓	—	—
Serial No. & Software Version	✓	—	✓	—
Engineering unit	✓	✓	✓	✓
Range limit	✓	—	✓	—
Measuring range	✓	✓	✓	✓
Damping	✓	✓	✓	✓
Output mode	Linear	✓	✓	✓
Burnout direction	✓	✓	✓	✓
Calibration	✓	✓	✓	✓
Output adjust	—	✓	—	✓
Data	✓	—	✓	—
Self diagnoses	✓	—	✓	—
Printer (In case of FXW with printer option)	✓	—	—	—
External switch lock	✓	✓	✓	✓
Transmitter display	✓	✓	✓	✓
Linearize	✓	✓	—	—
Rerange	✓	✓	✓	✓
Saturate current	✓	✓	✓	✓
Write protect	✓	✓	✓	✓
History				
- Calibration history	✓	✓	✓	✓

Programmable output linearization function :

Output signal can be characterized with "14 points linear approximation function" from the FXW communicator.

Performance specifications

(Reference conditions, silicone oil fill).

Accuracy ratings :

(Including linearity, hysteresis, and repeatability)

For spans greater than 1/10 of URL :

±0.2% of span

For spans below 1/10 of URL:

± (0,1 + 0,1 $\frac{0,1 \times \text{URL}}{\text{Span}}$) % of span

Option :

(not available for max span 16kPa abs, 130kPa abs)

For spans greater than 1/10 of URL :

±0.1% of span

For spans below 1/10 of URL :

± (0,05 + 0,05 $\frac{0,1 \times \text{URL}}{\text{Span}}$) % of span

Stability :

±0.2% of upper range limit (URL) for 3 years.

Temperature effect :

Effect per 28°C change between the limits of -25 to +55°C (in % of span).

Zero shift :

± (0,125 + 0,1 $\frac{\text{URL}}{\text{Span}}$) % / 28°C

Total effect:

± (0,15 + 0,1 $\frac{\text{URL}}{\text{Span}}$) % / 28°C

Overrange effect :

Zero shift : ±0.2% of URL for any overrange up to maximum limit.

Supply voltage effect :

Less than 0.05% of calibrated span per 10V

RFI effect :

Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30V/m when electronics covers on.

(Classification: 2-abc: 0.2% span per SAMA PMC 33.1)

Response time : (at 63,2% of the output signal)

Time constant (t) : 200 msec.

Dead time : approx. 200 msec

Response time = time constant + dead time

Mounting position effect :

Zero shift :

Less than 0.1kPa {1mbar} for a 10° tilt in any plane.

No effect on span. This error can be corrected by adjusting Zero.

Vibration effect :

< ±0,25% of span for spans greater than 1/10 of URL.

Frequency 10 to 150Hz, acceleration 39,2m/sec²

Dielectric strength :

500V AC, 50/60Hz during 1min. between terminals + & - on the one hand, and transmitter body on the other hand.

Leak current less than 3mA.

Insulation resistance :

More than 100MΩ at 500V DC during 1min. between terminals + & - on the one hand, and transmitter body on the other hand.

Turn-on time :

4 seconds

Internal resistance for external field indicator :

12Ω max (connected to test terminal CK+ and CK-).

Physical specifications

Electrical connections :

M20 x 1,5 or

ATEX flameproof cable gland, or

Souriau 8N35 socket, or

Souriau 8N45S socket, or

Souriau 8N45 socket, or

SAIB NU25 ref. 251-103-401 / M20 x 1,5 socket

(Compatible with 8N45 installed base)

Jaeger M20 x 1,5 socket ref. 536 006 006

Process connections :

Standard : 1/4" -18 NPT

Option : 1/2" - 14 NPT with oval flange

Process-wetted parts material :

Material code (7th digit)	Process cover	Diaphragm	wetted sensor body	Vent/ Drain
V	SS 316	SS 316L	SS316	SS 316
J	SS 316	SS 316L + gold coat	SS316	SS 316

Note : Sensor gasket : Viton o-ring

Non-wetted parts material :

Electronics housing :

- Standard :

Low copper die-cast aluminum alloy (standard), finished with epoxy / polyurethane double coating

- Option : SS 316

Bolts and nuts :

SS 316

Fill fluid :

Standard : silicone oil

Mounting bracket :

SS 304

Environmental protection :

IP66 / IP67

Mounting :

Without mounting bracket :

Direct mounting on manifold

With optional mounting bracket :

For 50mm (2") pipe or direct wall mounting.

Mass {weight} :

Transmitter only : 3,4 kg

Add :

Mounting bracket : 0,5 kg

indicator (option) : 0,34 kg (0,68 kg in SS)

SS housing (option) : 1,4 kg

Optional features

Indicator :

A plug-in analog indicator (1.5% accuracy) can be located in the electronics compartment or in the terminal box of the housing. Alternatively, an optional 5 digits LCD meter is also available on the electronics compartment side only.

Degreasing :

Process-wetted parts are cleaned, but the fill fluid is standard silicone oil not suitable oxygen or chlorine application. (Consult Fuji).

Optional customer tag plate (70 x 20 mm) :

A stainless steel tag for customer tag data is wired to the transmitter.

OPTIONAL ACCESSORIES

Oval flanges :

Converts process connection to 1/2"-14 NPT.

Hand held communicator FXW :

Refer to datasheet No EDS8-47

Manifolds :

Refer to datasheet No EDS6-F03

CODE SYMBOLS - FKA

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DESCRIPTION																																				
F	K	A											A	E	1																																					
																Absolute pressure transmitter																																				
																SMART : 4-20mA + FUJI and HART® digital signal																																				
																Connections																																				
																<table border="1"> <thead> <tr> <th>Process connections</th><th>Oval flange connection</th><th>Conduit connections</th></tr> </thead> <tbody> <tr> <td>(*5) 1/4"-18 NPT</td><td>M10</td><td>M20 x 1,5 (ATEX cable glande for flameproof (optional))</td></tr> <tr> <td>(*5) 1/4"-18 NPT</td><td>M10</td><td>Souriau 8N45S socket</td></tr> <tr> <td>(*4) 1/4"-18 NPT</td><td>M10</td><td>Souriau 8N45 socket (not for EPR reactors)</td></tr> <tr> <td>(*4) 1/4"-18 NPT</td><td>M10</td><td>Souriau 8N35 socket (not for EPR reactors)</td></tr> <tr> <td>(*5) 1/4"-18 NPT</td><td>M10</td><td>SAIB NU25, ref 251-103-401 / (M20x1,5) socket (compatible 8N45 installed equipment)</td></tr> <tr> <td>1/4"-18 NPT</td><td>M10</td><td>Jaeger (M20x1,5) socket ref 536 006 006</td></tr> </tbody> </table>	Process connections	Oval flange connection	Conduit connections	(*5) 1/4"-18 NPT	M10	M20 x 1,5 (ATEX cable glande for flameproof (optional))	(*5) 1/4"-18 NPT	M10	Souriau 8N45S socket	(*4) 1/4"-18 NPT	M10	Souriau 8N45 socket (not for EPR reactors)	(*4) 1/4"-18 NPT	M10	Souriau 8N35 socket (not for EPR reactors)	(*5) 1/4"-18 NPT	M10	SAIB NU25, ref 251-103-401 / (M20x1,5) socket (compatible 8N45 installed equipment)	1/4"-18 NPT	M10	Jaeger (M20x1,5) socket ref 536 006 006															
Process connections	Oval flange connection	Conduit connections																																																		
(*5) 1/4"-18 NPT	M10	M20 x 1,5 (ATEX cable glande for flameproof (optional))																																																		
(*5) 1/4"-18 NPT	M10	Souriau 8N45S socket																																																		
(*4) 1/4"-18 NPT	M10	Souriau 8N45 socket (not for EPR reactors)																																																		
(*4) 1/4"-18 NPT	M10	Souriau 8N35 socket (not for EPR reactors)																																																		
(*5) 1/4"-18 NPT	M10	SAIB NU25, ref 251-103-401 / (M20x1,5) socket (compatible 8N45 installed equipment)																																																		
1/4"-18 NPT	M10	Jaeger (M20x1,5) socket ref 536 006 006																																																		
W																Range & materials																																				
																<table border="1"> <thead> <tr> <th>Span (*1)</th><th>Process cover</th><th>Diaphragm</th><th>Wetted cell body</th></tr> </thead> <tbody> <tr> <td>(*1) 0,016/0,16 bar abs</td><td>SS 316</td><td>SS 316 L</td><td>SS 316</td></tr> <tr> <td></td><td>SS 316</td><td>SS 316 L + gold coat</td><td>SS 316</td></tr> <tr> <td>0,016/1,3 bar abs</td><td>SS 316</td><td>SS 316 L</td><td>SS 316</td></tr> <tr> <td></td><td>SS 316</td><td>SS 316 L + gold coat</td><td>SS 316</td></tr> <tr> <td>0,05/5 bar abs</td><td>SS 316</td><td>SS 316 L</td><td>SS 316</td></tr> <tr> <td></td><td>SS 316</td><td>SS 316 L + gold coat</td><td>SS 316</td></tr> <tr> <td>0,3/30 bar abs</td><td>SS 316</td><td>SS 316 L</td><td>SS 316</td></tr> <tr> <td></td><td>SS 316</td><td>SS 316 L + gold coat</td><td>SS 316</td></tr> </tbody> </table>	Span (*1)	Process cover	Diaphragm	Wetted cell body	(*1) 0,016/0,16 bar abs	SS 316	SS 316 L	SS 316		SS 316	SS 316 L + gold coat	SS 316	0,016/1,3 bar abs	SS 316	SS 316 L	SS 316		SS 316	SS 316 L + gold coat	SS 316	0,05/5 bar abs	SS 316	SS 316 L	SS 316		SS 316	SS 316 L + gold coat	SS 316	0,3/30 bar abs	SS 316	SS 316 L	SS 316		SS 316	SS 316 L + gold coat	SS 316
Span (*1)	Process cover	Diaphragm	Wetted cell body																																																	
(*1) 0,016/0,16 bar abs	SS 316	SS 316 L	SS 316																																																	
	SS 316	SS 316 L + gold coat	SS 316																																																	
0,016/1,3 bar abs	SS 316	SS 316 L	SS 316																																																	
	SS 316	SS 316 L + gold coat	SS 316																																																	
0,05/5 bar abs	SS 316	SS 316 L	SS 316																																																	
	SS 316	SS 316 L + gold coat	SS 316																																																	
0,3/30 bar abs	SS 316	SS 316 L	SS 316																																																	
	SS 316	SS 316 L + gold coat	SS 316																																																	
0	1	V														Transmitter version, indicator & initial setting																																				
0	1	J														<table border="1"> <thead> <tr> <th>Transmitter version</th><th>Indicator</th><th>Initial setting</th></tr> </thead> <tbody> <tr> <td>EDF "Not Classified"</td><td>None</td><td>4 - 20 mA CC +</td></tr> <tr> <td></td><td>Analog, 0-100% linear scale</td><td>Hart®/ FUJI</td></tr> <tr> <td></td><td>Analog, customer scale</td><td>digital signal</td></tr> <tr> <td></td><td>Analog, 0-100% linear scale</td><td>"Smart"</td></tr> <tr> <td></td><td>Analog, customer scale</td><td></td></tr> </tbody> </table>	Transmitter version	Indicator	Initial setting	EDF "Not Classified"	None	4 - 20 mA CC +		Analog, 0-100% linear scale	Hart®/ FUJI		Analog, customer scale	digital signal		Analog, 0-100% linear scale	"Smart"		Analog, customer scale																			
Transmitter version	Indicator	Initial setting																																																		
EDF "Not Classified"	None	4 - 20 mA CC +																																																		
	Analog, 0-100% linear scale	Hart®/ FUJI																																																		
	Analog, customer scale	digital signal																																																		
	Analog, 0-100% linear scale	"Smart"																																																		
	Analog, customer scale																																																			
0	2	V														L - A																																				
0	2	J														L - B																																				
0	3	V														L - D																																				
0	3	J														L - L																																				
0	4	V														L - P																																				
0	4	J																																																		
																Approvals for hazardous locations (consult Fuji)																																				
																None (standard)																																				
																(*2) Flameproof housing ATEX  II 2 GD - EEx d IIC T5/T6																																				
																Vent/drain & mounting bracket																																				
																<table border="1"> <thead> <tr> <th>Vent/drain</th><th>Mounting bracket (SS 304)</th></tr> </thead> <tbody> <tr> <td>In line</td><td>None</td></tr> <tr> <td>In line</td><td>Yes</td></tr> <tr> <td>Side</td><td>None</td></tr> <tr> <td>Side</td><td>Yes</td></tr> <tr> <td>Universal, direct mounting</td><td>None</td></tr> <tr> <td>Universal, direct mounting</td><td>Yes - Recommended for UTO stock</td></tr> </tbody> </table>	Vent/drain	Mounting bracket (SS 304)	In line	None	In line	Yes	Side	None	Side	Yes	Universal, direct mounting	None	Universal, direct mounting	Yes - Recommended for UTO stock																						
Vent/drain	Mounting bracket (SS 304)																																																			
In line	None																																																			
In line	Yes																																																			
Side	None																																																			
Side	Yes																																																			
Universal, direct mounting	None																																																			
Universal, direct mounting	Yes - Recommended for UTO stock																																																			
																Optional customer tag plate & Electronics housing																																				
																<table border="1"> <thead> <tr> <th>Tag plate</th><th>Electronics housing</th></tr> </thead> <tbody> <tr> <td>(*3) Without</td><td>Aluminium (not applicable for strong saline atmosphere or irradiated area)</td></tr> <tr> <td>(*3) SS 316L</td><td>Aluminium (not applicable for strong saline atmosphere or irradiated area)</td></tr> <tr> <td>(*3) Without</td><td>SS 316</td></tr> <tr> <td>(*3) SS 316L</td><td>SS 316</td></tr> </tbody> </table>	Tag plate	Electronics housing	(*3) Without	Aluminium (not applicable for strong saline atmosphere or irradiated area)	(*3) SS 316L	Aluminium (not applicable for strong saline atmosphere or irradiated area)	(*3) Without	SS 316	(*3) SS 316L	SS 316																										
Tag plate	Electronics housing																																																			
(*3) Without	Aluminium (not applicable for strong saline atmosphere or irradiated area)																																																			
(*3) SS 316L	Aluminium (not applicable for strong saline atmosphere or irradiated area)																																																			
(*3) Without	SS 316																																																			
(*3) SS 316L	SS 316																																																			
																Special applications & fill fluid																																				
																<table border="1"> <thead> <tr> <th>Treatment</th><th>Fill fluid</th></tr> </thead> <tbody> <tr> <td>None</td><td>Silicone oil</td></tr> <tr> <td>Degreasing</td><td>Silicone oil</td></tr> </tbody> </table>	Treatment	Fill fluid	None	Silicone oil	Degreasing	Silicone oil																														
Treatment	Fill fluid																																																			
None	Silicone oil																																																			
Degreasing	Silicone oil																																																			
																Process cover gasket																																				
																Viton																																				
																Bolts and nuts material																																				
																SS 316/316 (Bolts/nuts) - M10																																				
																Accessories (optional)																																				
																ATEX - Flameproof cable gland																																				

Notes* :

All models are equipped with surge arrester specifically designed for EDF.

1- Turn down of 100 : 1 is possible, but it should be used at a span greater than 1/25 of the maximum span for better performance.

2- Not available for SAIB, Souriau 8N35 / 8N45 / 8N45S and Jaeger sockets.

To use with flameproof cable gland ATEX delivered by FUJI (option) or mounted by EDF.

3- Use only SS316 housing (digit n°12 = C, E) inside salty atmosphere (eg : outside close to sea side), or irradiated area.

4- FKA6 & FKA7 transmitters can only be used in existing power plants (not for EPR).




5- FKA6, FKA3 & FKA8 transmitters can be used in existing power plants and EPR.

FKAW transmitters can be equipped with (optional) Flameproof cable gland. When mounted on the transmitter, additional 16th digit is set to 1.

OUTLINE DIAGRAM (unit : mm)


Conduit connection M20 x 1,5 (4th digit = W)

"In line vent/drain" configuration (11th digit : A & C)

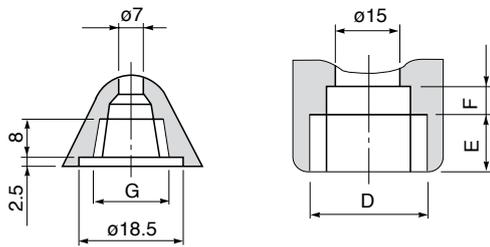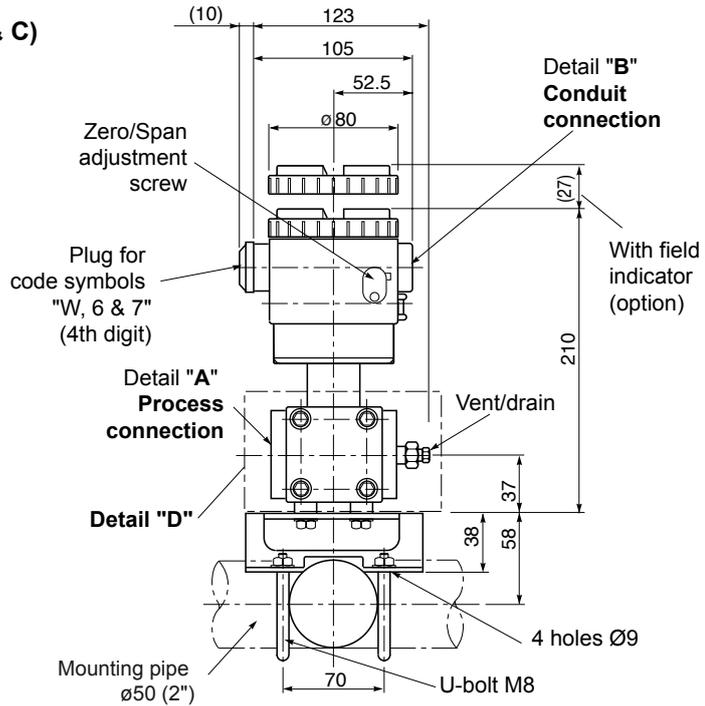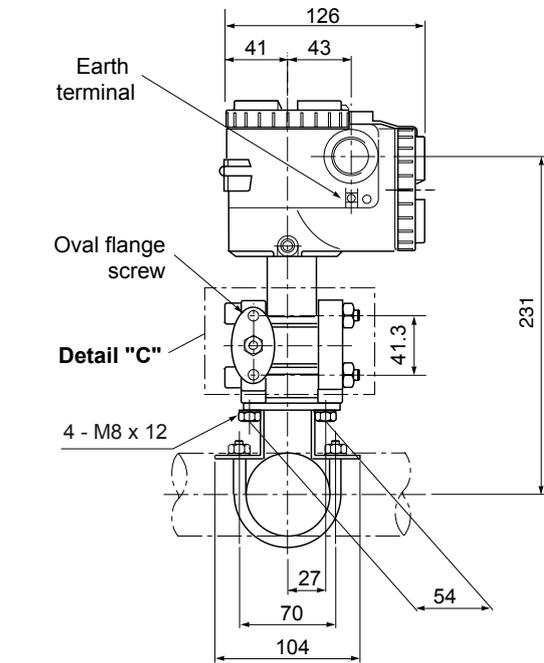


Detail "A" Process connection Detail "B" Conduit connection


4th digit	Conduit connection			Process connection
	D	E	F	G
W	M20 X 1,5	16	5	1/4"-18 NPT

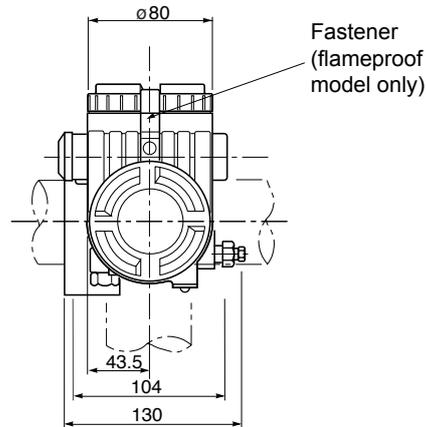

"Side vent/drain" configuration (11th digit : D & F)

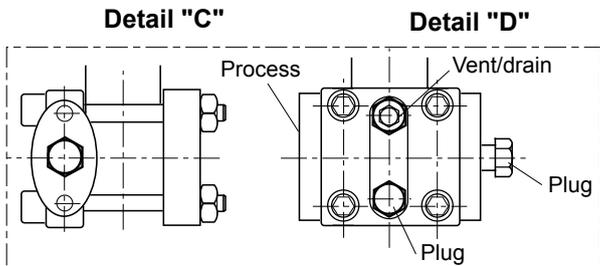

"Universal vent/drain, direct mounting" configuration (11th digit : G & H) (recommended for UTO stock)

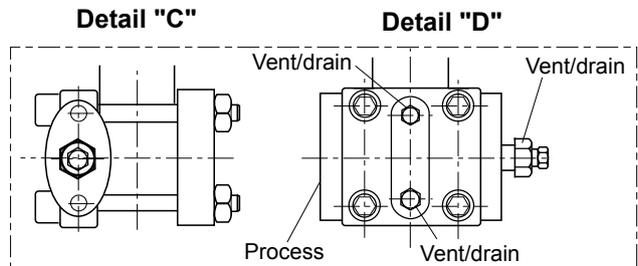




With this configuration, vent/drain function on the **external side** of the process flanges is achieved by way of vent screws directly attached to the flange (sealing is of metal to metal type). There is no more conventional screwed vent seat screwed in the flange and sealed with "PMCU Loctite" type compound.

OUTLINE DIAGRAM (unit : mm)

Conduit connection for SOURIAU sockets (4th digit = code 6 or 7)




For Souriau 8N35 socket

Conduit connection - SOURIAU 8N35

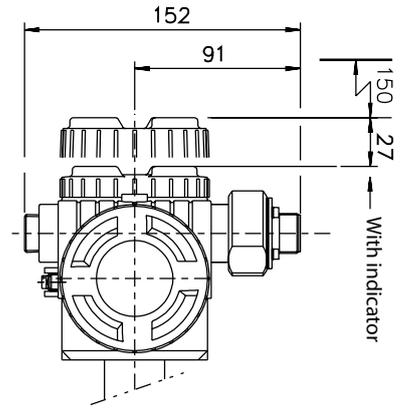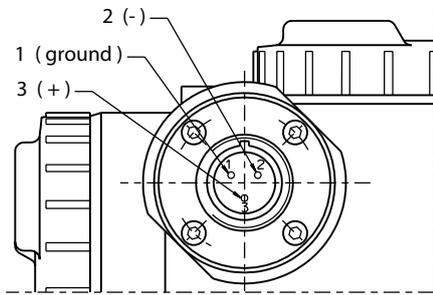




For Souriau 8N45 / 8N45S sockets

Conduit connection - SOURIAU 8N45 / 8N45S

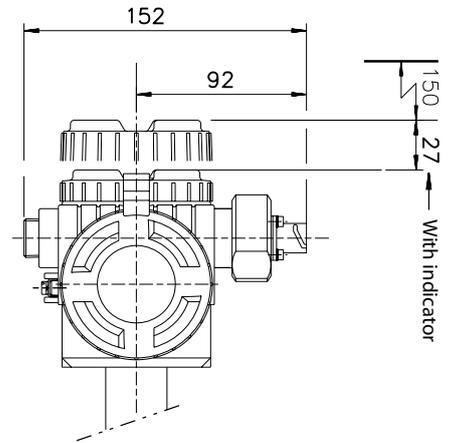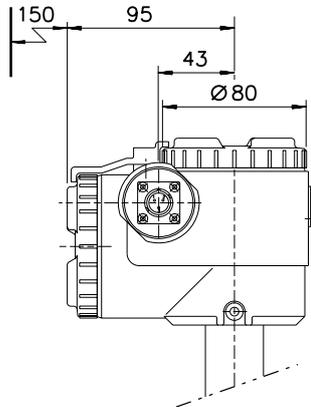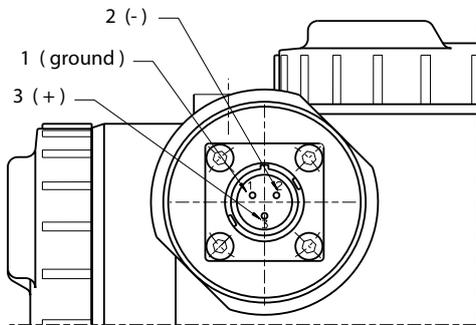




Conduit connection SAIB socket (4th digit = code 8)

Conduit connection SAIB socket

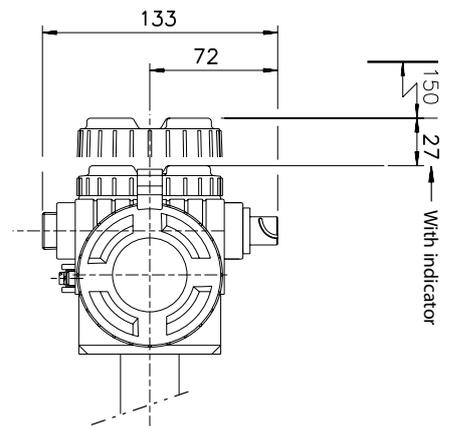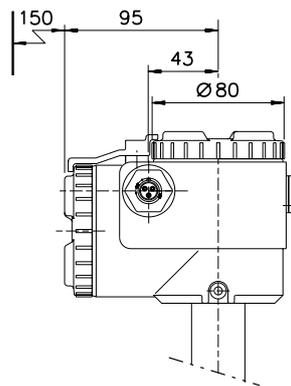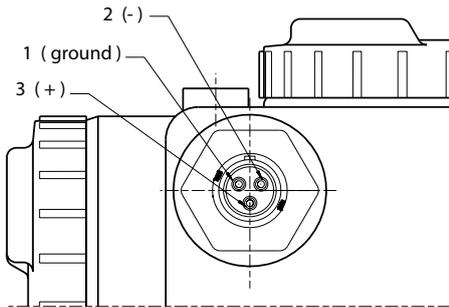


Conduit connection JAEGER socket (4th digit = code 9)

CONDUIT CONNECTION JAEGER réf 536 006 006

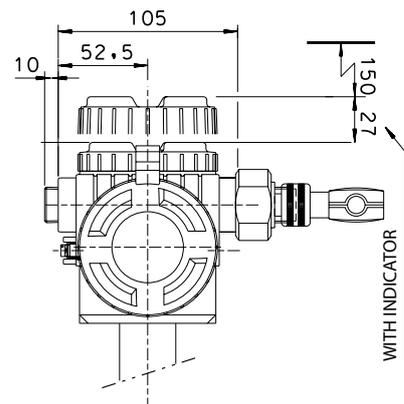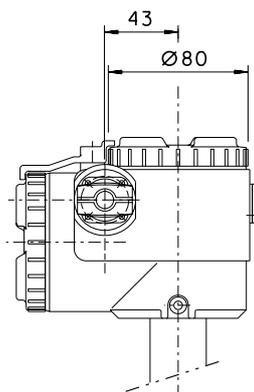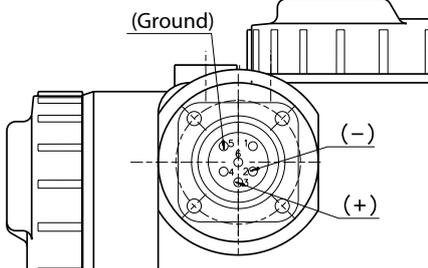


CONNECTION DIAGRAM



Connection of local analog indicator, or remote indicator of current 4/20mA loop test milliammeter. (max impedance = 12Ω)

OPTIONAL CUSTOMER TAG PLATE

Attached to transmitter with SS 304 wire

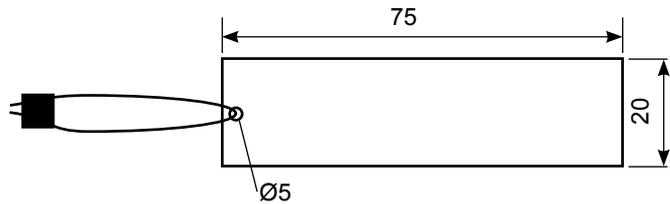

EMC Directive (2004/108/EC)

All models of **FCX** series transmitters type **FCX-AII & CII** are in accordance with :

- The harmonized standard EN 61326-1 : 2006 (Electrical equipment for measurement, control and laboratory use - EMC requirements).

Emission limits : EN 61326-1 : 2006

Frequency range (MHz)	Limits	Basic standard
30 to 230	40 dB (μV/m) quasi peak, measured at 10m distance	EN 55011 / CISPR 11 Groue 1 Class A
230 to 1000	47 dB (μV/m) quasi peak, measured at 10m distance	

Immunity requirements :

EN 61326-1 : 2006 (Table 2)

Phenomenon	Test value	Basic standard	Performance criteria
Electrostatic discharge	4 kV (Contact) 8 kV (Air)	EN 61000-4-2 IEC 61000-4-2	B
Electromagnetic field	10V/m (80 to 1000 MHz) 3 V/m (1.4 to 2.0 GHz) 1 V/m (2.0 to 2.7 GHz)	EN 61000-4-3 IEC 61000-4-3	A
Rated power frequency magnetic field	30 A/m	EN 61000-4-8 IEC 61000-4-8	A
Burst	2 kV (5/50 NS, 5 kHz)	EN 61000-4-4 IEC 61000-4-4	B
Surge	1 kV Line to line 2 kV Line to ligne	EN 61000-4-5 IEC61000-4-5	B
Conducted RF	3 V (150 kHz to 80 MHz)	EN 61000-4-6 IEC61000-4-6	A

Performance criteria :

A : During testing, normal performance within the specification limits.

B : During testing, temporary degradation or loss of function or performance which is self-recovering.

Fuji Electric France S.A.S.

46, Rue Georges Besse - Z I du Brézet

63 039 Clermont-Ferrand cedex 2 — FRANCE

France : Tél. 04 73 98 26 98 - Fax 04 73 98 26 99

International : Tél. (33) 4 7398 2698 - Fax. (33) 4 7398 2699

E-mail : sales.dpt@fujielectric.fr