

# GAUGE PRESSURE TRANSMITTER

EDF "Not Classified" version and EDF "K3A Classification" version

## DATA SHEET

**FKG...K, L**

The FCX-All pressure transmitter accurately measures gauge pressure and transmits a proportional 4 to 20mA signal. The transmitter utilizes a unique micromachined capacitive silicon sensor with state-of-the-art microprocessor technology to provide exceptional performance and functionality.

## FEATURES

- 1- High accuracy**  
0,07% accuracy is a standard feature for Fuji's micro-capacitance silicon sensor.
- 2- Minimum environmental influence**  
The "Advance Floating Cell" design, which protects the pressure sensor against changes in temperature, and overpressure, substantially reduces total measurement error in actual field applications.
- 3- Fuji/HART® bilingual communication protocol**  
FCX-All series transmitter offers bilingual communication to speak both Fuji proprietary protocol and HART®. Any HART® compatible devices can communicate with FCA-All.
- 4- Application flexibility**  
Various options that render the FCX-All suitable for almost any process applications includes :
  - Analog indicator at either the electronics side or terminal side
  - Full range of hazardous area approvals
  - Built-in RFI filter and lightning arrester
  - 5 digits LCD meter with engineering unit
  - Stainless steel electronics housing
  - Wide selection of materials
- 5. Programmable output Linearisation Function**  
In addition to linear, output signal is freely programmable.
- 6. Burnout current flexibility**  
**(Under Scale : 3.2 to 4.0mA, Over Scale : 20.0 to 22.5mA)**  
Burnout signal level is adjustable using Hand Held Communicator (Fuji FXW) to comply with NAMUR NE43.
- 7. Dry calibration without reference pressure**  
Thanks to the best combination of unique construction of mechanical parts (sensor unit) and high performance electronics circuit (electronics unit), reliability of dry calibration without reference pressure is at equal level as wet calibration.



## Functional specifications

### Type :

FKG : SMART, 4-20mA cc + Fuji /HART® digital signal

### Service :

Liquid, gas or vapour

### Span, range and overrange limit :

Type	Span limit [kPa] {bar}		Range limit [kPa] {bar}		Overrange limit [MPa] {bar}
	Min.	Max.	Lower limit	Upper limit	
FKG□01	1,3 {0,013}	130 {1,3}	-100 {-1}	130 {1,3}	1 {10}
FKG□02	5 {0,05}	500 {5}	-100 {-1}	500 {5}	1.5 {15}
FKG□03	30 {0,3}	3000 {30}	-100 {-1}	3000 {30}	9 {90}
FKG□04	100 {1}	10000 {100}	-100 {-1}	10000 {100}	15 {150}
FKG□05	500 {5}	50000 {500}	-100 {-1}	50000 {500}	79 {790}

### Caution :

For K3A qualified models the ratio max. Span / adjusted span (rangeability) must be ≤ 10:1

### Lower range limit (vacuum limit) :

Silicone fill sensor : Fig. 1 page 4

Fluorinated fill sensor : 660 mbar abs. (500 torr) at temperature below 60°C.

### Output signal :

4 to 20mA DC with Fuji /HART® digital signal superimposed on the 4 to 20mA signal.

### Power supply :

Transmitter operates on 10,5V to 53V DC at transmitter terminals

**Load limitations :**

Mini = 0Ω without digital communication  
 = 250 Ω mini for digital communication (Fuji or HART® protocols)  
 Maxi (Ω) = (V power supply - 10,5) / 0,0225 for default settings  
 Maxi (Ω) = (V power supply - 10,5) / (Imax +0,9) x 1000 for user settings, where Imax (mA) is the highest of the following values :

- Either the max output signal in case of electronics failure (Burnout), when OVER SCALE Burnout is selected
- Or the max output process signal in case saturation over 20mA, when "SATURATE CUR" is selected to "SAT HI"

For details, see FCXAll or FXW Hand Held Communicator manuals.

Note : Above values are applicable for electronics from version 4FA (software 4.06), which includes K3A qualified models.

**Hazardous locations :**

Designed to meet international intrinsic safety and flameproof (explosionproof) standards.

Please consult the code symbols some pages further on, to know the different types of approvals (digit 10). Consult FUJI for status.

**Zero/span adjustment :**

Zero and span are adjustable by the FXW communicator. Local adjustment of zero and span are possible from outside screw on the electronics housing.

**Damping :**

Additional damping of the output signal is adjustable between 0,12 and 32 sec with the FXW communicator, and/or with the optional LCD indicator.

**Zero elevation/suppression :**

Adjustable with the FXW communicator or with the external screw on the electronics housing between -100kPa to +100% of URL.

**Normal/reverse action :**

Programmable with the FXW communicator

**Indication :**

A plug-in analog indicator (accuracy 1,5%) can be mounted on the electronics unit or the terminal block. The local LCD indicator (5 digits) is assembled on the electronics unit.

Additional local adjustment facilities are possible by the integrated switches in the LCD indicator :

- "Local/comm" switch gives the possibilities to make local adjustments of zero/span, damping or to configure the transmitter with the FXW communicator.
- The "mode" switch with 7 positions gives local adjustment possibilities for zero/span, 4/20mA, enable or inhibit the local adjustments.
- Local damping adjustment is possible via the "damp" switch.

**Burnout direction :** (selected from the FXW communicator)

If self-diagnostic detect transmitter failure, the analog signal will be driven to either "Output Hold", "Output Overscale" or "Output Underscale" modes.

**"Output Hold" :**

Output signal is hold at the value just before failure happens.

**"Output Overscale" :**

Adjustable within the range 20.0 mA to 22.5 mA from the FXW communicator.

**"Output Underscale" :**

Adjustable within the range 3.2 mA to 4.0 mA from the FXW communicator.

**Loop-check output :**

Transmitter can be configured to provide constant signal of 3.8mA to 21.6mA by the FXW communicator.

**Temperature limit :**

**Ambient :**

- 40 to +60°C (-25 to +55°C for K3A)
- 20 to +60°C (-20 to +55°C for K3A) for optional LCD indicator
- 20 to +60°C for optional fluorinated oil

For explosionproof units (flameproof or intrinsic safety), ambient temperature must be within the limits specified by each standard.

**Process :**

- 40 to +120°C (silicone oil)
- 20 to +80°C (fluorinated oil)

**Storage :**

- 40 to +90°C

**Humidity :**

0 to 100% RH (electronics housing closed and sealed)

**Communication :**

With HHC<sup>(1)</sup> (Model FXW, consult datasheet EDS8-47), following items can be remotely displayed or configured.

Note: HHC's version must be higher than 7.0 (or FXW □□□□1-□4), for FCX-All for supporting these items: "Saturate current", "Write protect", and "History".

Items	Fuji Protocol with FXW		Hart Protocol	
	Display	Set	Display	Set
Tag No.	v	v	v	v
Model No.	v	v	—	—
Serial No. & Software Version	v	—	v	—
Engineering unit	v	v	v	v
Range limit	v	—	v	—
Measuring range	v	v	v	v
Damping	v	v	v	v
Output mode	Linear		v	v
Burnout direction	v	v	v	v
Calibration	v	v	v	v
Output adjust	—	v	—	v
Data	v	—	v	—
Self diagnoses	v	—	v	—
Printer (In case of FXW with printer option)	v	—	—	—
External switch lock	v	v	v	v
Transmitter display	v	v	v	v
Linearize	v	v	—	—
Rerange	v	v	v	v
Saturate current	v	v	v	v
Write protect	v	v	v	v
History	—			
– Calibration history	v	v	v	v

**Programmable output linearization function :**

Output signal can be characterized with "14 points linear approximation function" from the FXW communicator.

## Performance specifications

(reference conditions, silicone oil fill).

### Accuracy ratings

(including linearity, hysteresis, and repeatability)

#### Max span up to 10 MPa models :

For spans greater than 1/10 of URL :  
±0,07% of span

For spans below 1/10 of URL :

$\pm(0,02 + 0,05 \frac{0,1 \times \text{URL}}{\text{Span}})$  % of span

#### Max span for 50 MPa model :

For spans greater than 1/10 of URL :  
±0,1% of span

For spans below 1/10 of URL :

$\pm(0,05 + 0,05 \frac{0,1 \times \text{URL}}{\text{Span}})$  % of span

### Stability :

± 0,1% of upper range limit (URL) for 3 years.

### Temperature effect :

Effects per 28°C change between the limits of -25 and +55°C (in % of span).

Zero shift :

$\pm(0,075 + 0,0125 \frac{\text{URL}}{\text{Span}})$  % / 28°C

Total effect :

$\pm(0,095 + 0,0125 \frac{\text{URL}}{\text{Span}})$  % / 28°C

Double the effects for material code A in 7 th digit in codes symbols

### Overrange effect :

Zero shift :

0.2% of URL for any overrange up to maximum limit

### Supply voltage effect :

Less than 0.05% of calibrated span per 10V

### RFI effect :

Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30V/m when electronics covers on.

(Classification: 2-abc: 0.2% span per SAMA PMC 33.1)

### Response time : (at 63,2% of the output signal)

Time constant (t) : 200 msec.

Dead time : approximately 200 msec

Response time = time constant + dead time

### Mounting position effect :

Zero shift :

Less than 0.1kPa {1mbar} for a 10° tilt in any plane.

No effect on span. This error can be corrected by adjusting Zero.

### Vibration effect :

< ±0,25% of span for spans greater than 1/10 of URL.

Frequency 10 to 150Hz, acceleration 39,2m/sec<sup>2</sup>

### Dielectric strength :

500V AC, 50/60Hz during 1min. between terminals + & - on the one hand, and transmitter body on the other hand.

Leak current less than 3 mA.

### Insulation resistance :

More than 100MΩ at 500V DC during 1min. between

terminals + & - on the one hand, and transmitter body on the other hand.

Turn-on time : 4 seconds

### Internal resistance for external field indicator :

12Ω max (connected to test terminal CK+ and CK-).

## Physical specifications

### Electrical connections :

M20 x 1,5 or

ATEX flameproof cable gland, or

Souriau 8N35 socket, or

Souriau 8N45S socket, or

Souriau 8N45 socket, or

SAIB NU25 ref. 251-103-401 / M20 x 1,5 socket

(Compatible with 8N45 installed base)

Jaeger M20 x 1,5 socket ref. 536 006 006

### Process connections :

Standard : 1/4" -18 NPT

Option : 1/2" -14 NPT with oval flange

### Process-wetted parts material :

Material code (7th digit)	Process cover	Diaphragm	wetted sensor body	Vent/ Drain
V	SS 316	SS 316 L	SS 316	SS 316
A	Hast C276	Hast C276	Hast C276	Hast C276
J	SS 316	SS 316 L + gold coat	SS 316	SS 316

Note :

Sensor gasket : Viton o-ring

### Non-wetted parts material:

Electronics housing :

- Standard :

Low copper die-cast aluminum alloy (standard), finished with epoxy / polyurethane double coating

- Option : SS 316

Bolts and nuts :

SS 316 for pressure ≤100 bar

SS 660 for pressure >100 bar

Fill fluid :

Standard : silicone oil

Option : fluorinated oil

Mounting bracket :

SS 304.

### Environmental protection :

IP66/IP67

### Mounting :

Without mounting bracket :

Direct mounting on manifold

With optional mounting bracket :

For 50mm (2") pipe or direct wall mounting.

### Mass {weight} :

Transmitter only : 4,33 kg

Add :

Mounting bracket : 0,5 kg

indicator (option) : 0,34 kg (0,68 kg in SS)

SS housing (option) : 1,4 kg

## Optional features

### Indicator :

A plug-in analog indicator (1.5% accuracy) can be located in the electronics compartment or in the terminal box of the housing. Alternatively, an optional 5 digits LCD meter is also available on the electronics compartment side only.

### Oxygen service :

Special cleaning procedures are followed throughout the process to maintain all process wetted parts oil-free.

The fill fluid is fluorinated oil.

### Degreasing :

Process wetted parts are cleaned, but the fill fluid is standard silicone oil. This option must not be selected for oxygen or chlorine applications.

### Customer tag plate (70 x 20 mm) :

A stainless steel tag with customer tag data is wired to the transmitter.

### Vacuum service :

Special silicone oil and filling procedure are applied.

See below figure.

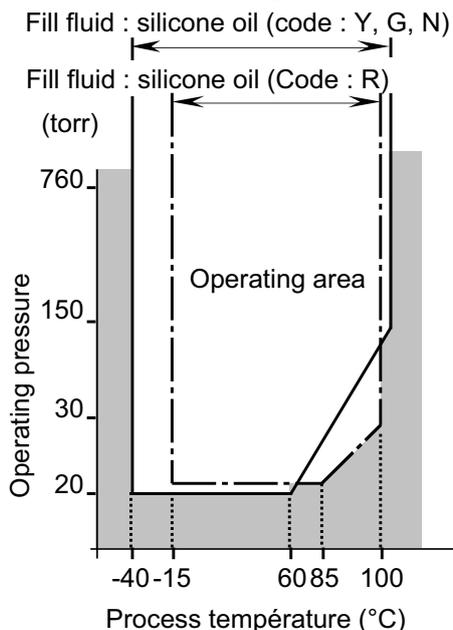


Fig.1 Relation between the temperature of process in contact with cell's diaphragms and operating pressure.

## OPTIONAL ACCESSORIES

### Oval flanges :

Converts process connection to 1/2"-14 NPT

### Hand held communicator FXW :

Refer to Data Sheet No.EDS8-47

### Manifolds :

Refer to datasheet No. EDS6-F03

# CODE SYMBOLS - FKG

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Description																																		
F	K	G											A			<b>Gauge pressure transmitter</b> SMART : 4-20mA Acc + FUJI and HART® digital signal																																		
																<b>Connections</b>																																		
																<table border="1"> <thead> <tr> <th>Process connection</th><th>Oval flange connection</th><th>Conduit connection</th></tr> </thead> <tbody> <tr> <td>(*)9 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>M20 x 1,5 (ATEX cable gland for flameproof (optional))</td></tr> <tr> <td>(*)9 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>Souriau 8N45S socket</td></tr> <tr> <td>(*)8 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>Souriau 8N45 socket (not for EPR reactors)</td></tr> <tr> <td>(*)8 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>Souriau 8N35 socket (not for EPR reactors)</td></tr> <tr> <td>(*)9 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>SAIB NU25, ref 251-103-401 / M20 x 1,5 socket (compatible with 8N45 installed equipment)</td></tr> <tr> <td>(*)6 (*)1 1/4-18 NPT</td><td>M10 or M12 (*)1</td><td>JAEGER (M20x1,5) socket ref 635 006 006</td></tr> </tbody> </table>	Process connection	Oval flange connection	Conduit connection	(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	M20 x 1,5 (ATEX cable gland for flameproof (optional))	(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N45S socket	(*)8 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N45 socket (not for EPR reactors)	(*)8 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N35 socket (not for EPR reactors)	(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	SAIB NU25, ref 251-103-401 / M20 x 1,5 socket (compatible with 8N45 installed equipment)	(*)6 (*)1 1/4-18 NPT	M10 or M12 (*)1	JAEGER (M20x1,5) socket ref 635 006 006													
Process connection	Oval flange connection	Conduit connection																																																
(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	M20 x 1,5 (ATEX cable gland for flameproof (optional))																																																
(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N45S socket																																																
(*)8 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N45 socket (not for EPR reactors)																																																
(*)8 (*)1 1/4-18 NPT	M10 or M12 (*)1	Souriau 8N35 socket (not for EPR reactors)																																																
(*)9 (*)1 1/4-18 NPT	M10 or M12 (*)1	SAIB NU25, ref 251-103-401 / M20 x 1,5 socket (compatible with 8N45 installed equipment)																																																
(*)6 (*)1 1/4-18 NPT	M10 or M12 (*)1	JAEGER (M20x1,5) socket ref 635 006 006																																																
																<b>Ranges &amp; materials</b>																																		
																<table border="1"> <thead> <tr> <th>Span (*)2</th><th>Process cover</th><th>Diaphragm</th><th>Wetted cell body</th></tr> </thead> <tbody> <tr> <td>(*)6 13 to 1300 mbar</td><td>SS 316L Hast C276</td><td>SS 316L Hast C276</td><td>SS 316 Hast C276</td></tr> <tr> <td>(*)6 0,05 to 5 bar</td><td>SS 316L Hast C276</td><td>SS 316L Hast C276</td><td>SS 316 Hast C276</td></tr> <tr> <td>(*)6 0,3 to 30 bar</td><td>SS 316L Hast C276</td><td>SS 316L Hast C276</td><td>SS 316 Hast C276</td></tr> <tr> <td>(*)6 1 to 100 bar</td><td>SS 316L Hast C276</td><td>SS 316L Hast C276</td><td>SS 316 Hast C276</td></tr> <tr> <td>(*)6 5 to 500 bar</td><td>SS 316L SS 316L</td><td>SS 316L SS 316L + golg coat</td><td>SS 316 SS 316</td></tr> </tbody> </table>	Span (*)2	Process cover	Diaphragm	Wetted cell body	(*)6 13 to 1300 mbar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276	(*)6 0,05 to 5 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276	(*)6 0,3 to 30 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276	(*)6 1 to 100 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276	(*)6 5 to 500 bar	SS 316L SS 316L	SS 316L SS 316L + golg coat	SS 316 SS 316										
Span (*)2	Process cover	Diaphragm	Wetted cell body																																															
(*)6 13 to 1300 mbar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276																																															
(*)6 0,05 to 5 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276																																															
(*)6 0,3 to 30 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276																																															
(*)6 1 to 100 bar	SS 316L Hast C276	SS 316L Hast C276	SS 316 Hast C276																																															
(*)6 5 to 500 bar	SS 316L SS 316L	SS 316L SS 316L + golg coat	SS 316 SS 316																																															
																<b>Transmitter version, indicator and initial setting</b>																																		
																<table border="1"> <thead> <tr> <th>Transmitter version</th><th>Indicator</th><th>Initial setting</th></tr> </thead> <tbody> <tr> <td>EDF "K3A Classification"</td><td>None</td><td>4 - 20 mA CC + Hart® / FUJI digital signal "Smart"</td></tr> <tr> <td>(*)5 EDF "Not Classified"</td><td>None Analog, 0-100% linear scale Analog, customer scale Analog, 0-100% linear scale Analog, customer scale</td><td></td></tr> </tbody> </table>	Transmitter version	Indicator	Initial setting	EDF "K3A Classification"	None	4 - 20 mA CC + Hart® / FUJI digital signal "Smart"	(*)5 EDF "Not Classified"	None Analog, 0-100% linear scale Analog, customer scale Analog, 0-100% linear scale Analog, customer scale																										
Transmitter version	Indicator	Initial setting																																																
EDF "K3A Classification"	None	4 - 20 mA CC + Hart® / FUJI digital signal "Smart"																																																
(*)5 EDF "Not Classified"	None Analog, 0-100% linear scale Analog, customer scale Analog, 0-100% linear scale Analog, customer scale																																																	
																<b>Approvals for hazardous locations (consulter Fuji)</b>																																		
																<table border="1"> <tbody> <tr> <td>A</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>None (standard)</td></tr> <tr> <td>X</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>(*)4 Flameproof housing ATEX  II 2 GD - EEx d IIC T5/T6</td></tr> </tbody> </table>	A																None (standard)	X																(*)4 Flameproof housing ATEX  II 2 GD - EEx d IIC T5/T6
A																None (standard)																																		
X																(*)4 Flameproof housing ATEX  II 2 GD - EEx d IIC T5/T6																																		
																<b>Vent / drain &amp; mounting bracket</b>																																		
																<table border="1"> <thead> <tr> <th>Vent / drain</th><th>Mounting bracket (SS 304)</th></tr> </thead> <tbody> <tr> <td>A In line</td><td>None</td></tr> <tr> <td>C In line</td><td>Yes</td></tr> <tr> <td>D Side</td><td>None</td></tr> <tr> <td>F Side</td><td>Yes</td></tr> <tr> <td>G Universal, direct mounting</td><td>None</td></tr> <tr> <td>H Universal, direct mounting</td><td>Yes - Recommended for UTO stock</td></tr> </tbody> </table>	Vent / drain	Mounting bracket (SS 304)	A In line	None	C In line	Yes	D Side	None	F Side	Yes	G Universal, direct mounting	None	H Universal, direct mounting	Yes - Recommended for UTO stock																				
Vent / drain	Mounting bracket (SS 304)																																																	
A In line	None																																																	
C In line	Yes																																																	
D Side	None																																																	
F Side	Yes																																																	
G Universal, direct mounting	None																																																	
H Universal, direct mounting	Yes - Recommended for UTO stock																																																	
																<b>Optional customer tag plate &amp; Electronics housing</b>																																		
																<table border="1"> <thead> <tr> <th>Tag plate</th><th>Electronics housing</th></tr> </thead> <tbody> <tr> <td>Y (*)7 (*)6 Without</td><td>Aluminium (not applicable for strong saline atmosphere or irradiated area)</td></tr> <tr> <td>B (*)7 (*)6 SS 316L</td><td>Aluminium (not applicable for strong saline atmosphere or irradiated area)</td></tr> <tr> <td>C (*)7 (*)6 without</td><td>SS 316</td></tr> <tr> <td>E (*)7 (*)6 SS 316L</td><td>SS 316</td></tr> </tbody> </table>	Tag plate	Electronics housing	Y (*)7 (*)6 Without	Aluminium (not applicable for strong saline atmosphere or irradiated area)	B (*)7 (*)6 SS 316L	Aluminium (not applicable for strong saline atmosphere or irradiated area)	C (*)7 (*)6 without	SS 316	E (*)7 (*)6 SS 316L	SS 316																								
Tag plate	Electronics housing																																																	
Y (*)7 (*)6 Without	Aluminium (not applicable for strong saline atmosphere or irradiated area)																																																	
B (*)7 (*)6 SS 316L	Aluminium (not applicable for strong saline atmosphere or irradiated area)																																																	
C (*)7 (*)6 without	SS 316																																																	
E (*)7 (*)6 SS 316L	SS 316																																																	
																<b>Special applications &amp; fill fluids</b>																																		
																<table border="1"> <thead> <tr> <th>Treatment</th><th>Fill fluids</th></tr> </thead> <tbody> <tr> <td>Y (*)6 None</td><td>Silicone oil</td></tr> <tr> <td>G Degreasing</td><td>Silicone oil</td></tr> <tr> <td>A (*)6 Oxygen service</td><td>Fluorinated oil</td></tr> <tr> <td>R (*)6 Vacuum service</td><td>Silicone oil for vacuum service</td></tr> </tbody> </table>	Treatment	Fill fluids	Y (*)6 None	Silicone oil	G Degreasing	Silicone oil	A (*)6 Oxygen service	Fluorinated oil	R (*)6 Vacuum service	Silicone oil for vacuum service																								
Treatment	Fill fluids																																																	
Y (*)6 None	Silicone oil																																																	
G Degreasing	Silicone oil																																																	
A (*)6 Oxygen service	Fluorinated oil																																																	
R (*)6 Vacuum service	Silicone oil for vacuum service																																																	
																<b>Process cover gasket</b>																																		
																Viton																																		
																<b>Bolts and nuts material</b>																																		
																<table border="1"> <tbody> <tr> <td>E (*)3</td><td>SS 316/316 (Bolts/nuts) - M10</td></tr> <tr> <td>W (*)3</td><td>SS 660/660 (Bolts/nuts) - M12</td></tr> </tbody> </table>	E (*)3	SS 316/316 (Bolts/nuts) - M10	W (*)3	SS 660/660 (Bolts/nuts) - M12																														
E (*)3	SS 316/316 (Bolts/nuts) - M10																																																	
W (*)3	SS 660/660 (Bolts/nuts) - M12																																																	
																<b>Accessories (optional)</b>																																		
																1 ATEX - Flameproof cable gland																																		

## Notes\* :



All models are equipped with surge arrester specifically designed for EDF.

- The thread of process cover is M12 if operating pressure > 100 bar (6th digit = 5)
- Turn down of 100 : 1 is possible, but it should be used at a span greater than 1/25 of the maximum span for better performance. For K3A qualified models, the ratio max. span / adjusted span (rangeability) must be ≤ 10:1
- SS316 M10 bolting (digit n°15 = E) is only for use with models whose maximum working pressure is up to 100 bar ; For operation pressure > 100 bar, please specify : SS 660 bolts in M12 (15th digit = W); Bolting for process covers of transmitters Classified K3A has got a corrosion protective treatment on all non machined surfaces.
- Not available for SAIB, Souriau 8N35/8N45/8N45S and Jaeger sockets. To use with flameproof cable gland ATEX delivered by FUJI (option) or mounted by EDF.
- Transmitters' design is similar to K3A but on standard QA (ISO 9001).
- Only applicable for transmitter version EDF "Not Classified" Digit 8 code L
- Use only SS316 housing (digit n°12 = C, E) inside salty atmosphere (eg : outside close to sea side), or irradiated area.
- FKG6 & FKG7 transmitters can only be used in existing power plants (not for EPR)
- FKGW, FKG3 & FKG8 transmitters can be used in existing power plants and EPR. FKGW transmitters can be equipped with (optional) Flameproof cable gland. When mounted on the transmitter, additional 16th digit is set to 1.


**OUTLINE DIAGRAM** (unit : mm)

**Conduit connection M20 x 1,5 (4th digit = W)**


"In line vent/drain" configuration (11th digit : A & C)

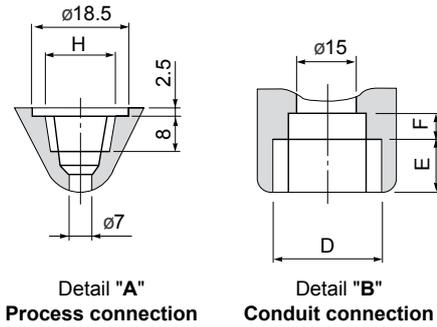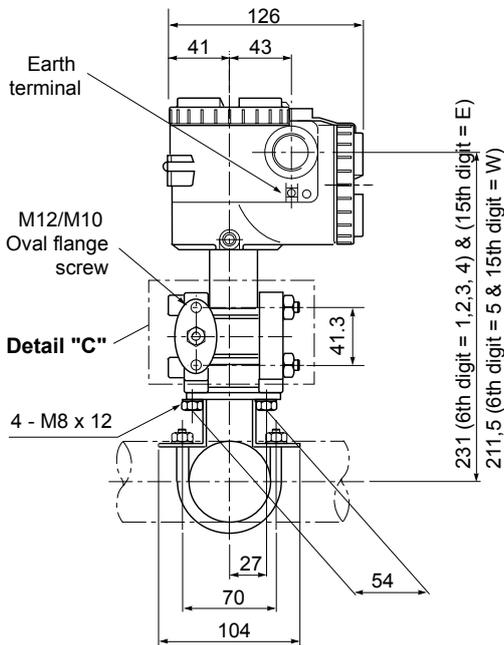


4th digit	Conduit connection			Process connection
	D	E	F	G
W	M20 x 1,5	16	5	1/4"-18 NPT

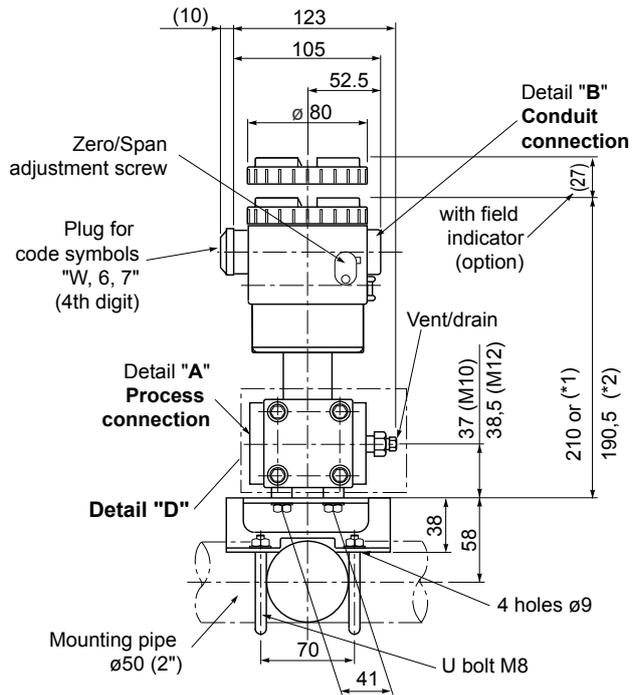


Notes\*  
 (\*1) 210 : (6th digit = 1, 2, 3, 4) & (15th digit = E)  
 (\*2) 190,5 : (6th digit = 5) & (15th digit = W)

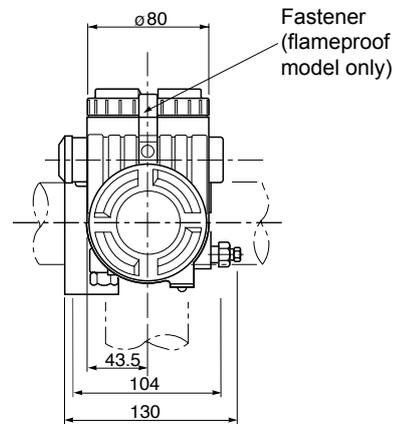

"Side vent/drain" configuration (11th digit : D & F)

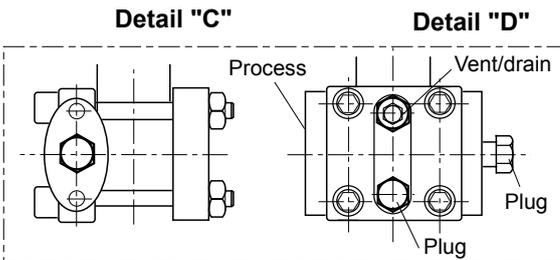

"Universal vent/drain, direct mounting" configuration (11th digit : G & H) (recommended for UTO stock)

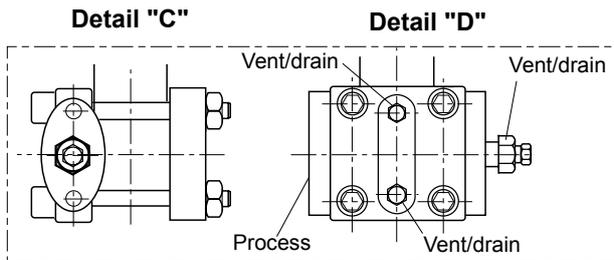


With this configuration, vent/drain function on the **external side** of the process flanges is achieved by way of vent screws directly attached to the flange (sealing is of metal to metal type). There is no more conventional screwed vent seat screwed in the flange and sealed with "PMCU Loctite" type compound.

# OUTLINE DIAGRAM (unit : mm)

## Conduit connection for SOURIAU sockets (4th digit = code 3, 6 or 7)


### For Souriau 8N35 socket

CONDUIT CONNECTION - SOURIAU 8N35

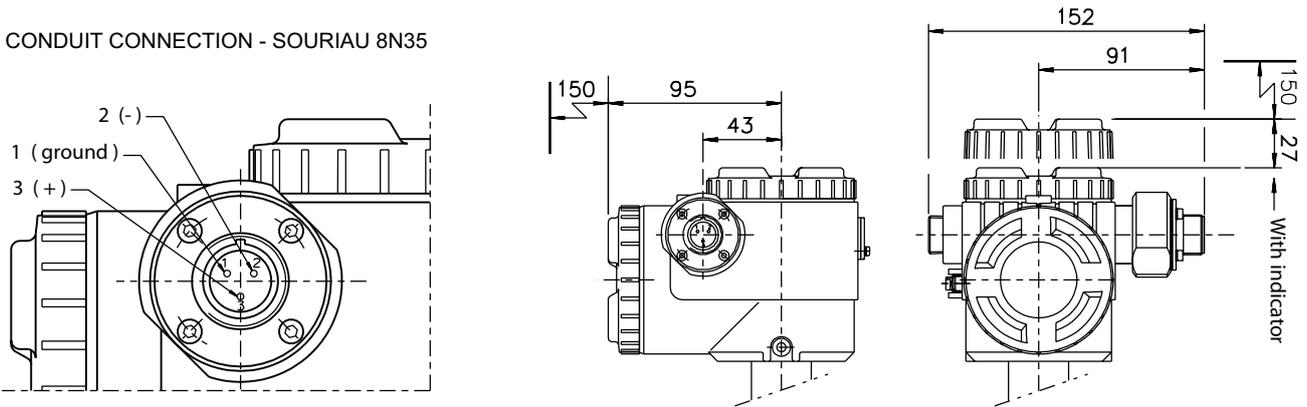


### For Souriau 8N45 / 8N45S sockets

Conduit connection - SOURIAU 8N45 / 8N45S

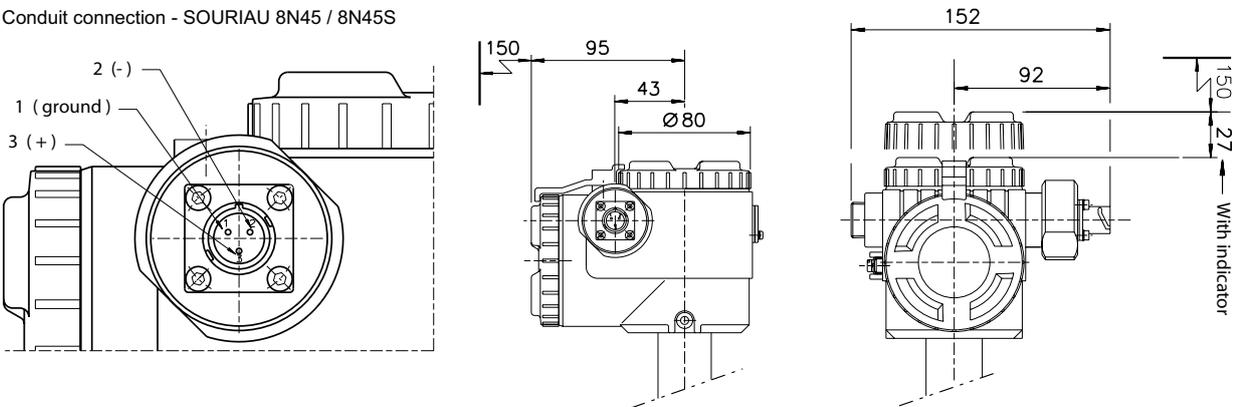


## Conduit connection for SAIB socket (4th digit = code 8)

CONDUIT CONNECTION- SAIB socket

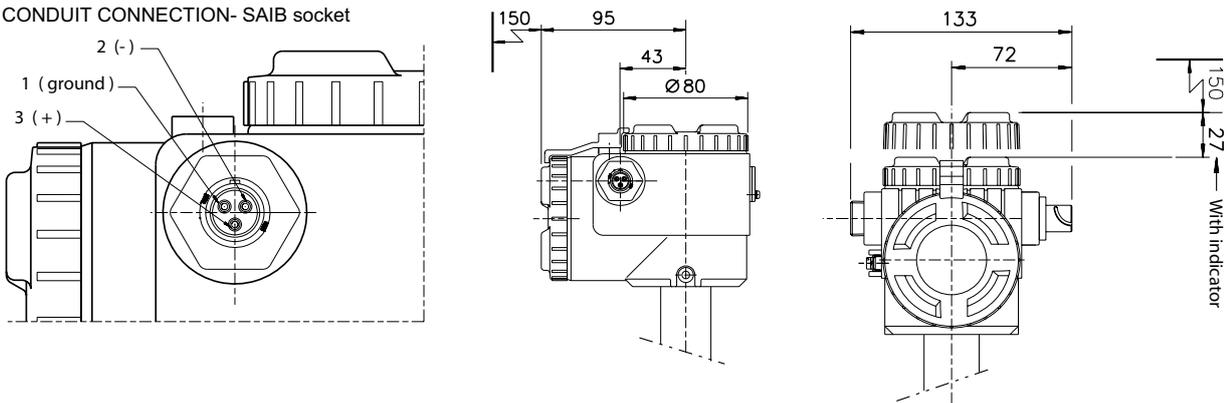


## Conduit connection for JAEGER socket (4th digit = code 9)

CONDUIT CONNECTION JAEGER réf 536 006 006

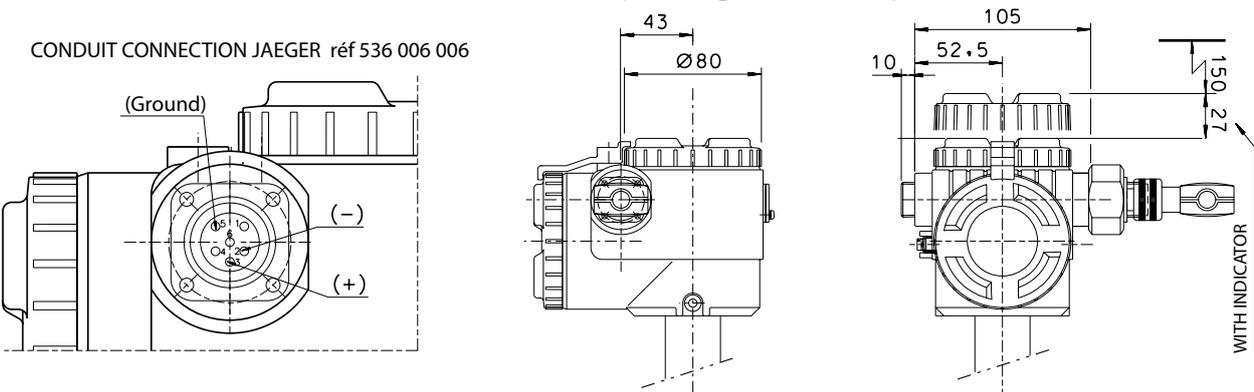


### CONNECTION DIAGRAM



Connection of local analog indicator, or remote indicator of current 4/20mA loop test milliampmeter. (max impedance = 12Ω)

### OPTIONAL CUSTOMER TAG PLATE

Attached to transmitter with SS 304 wire

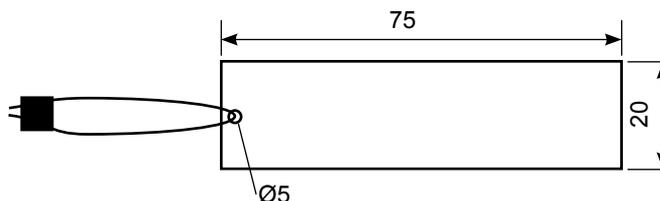

#### EMC Directive (2004/108/EC)

All models of **FCX** series transmitters type **FCX-AII & CII** are in accordance with :

- The harmonized standard EN 61326-1 : 2006 (Electrical equipment for measurement, control and laboratory use - EMC requirements).

#### Emission limits : EN 61326-1 : 2006

Frequency range (MHz)	Limits	Basic standard
30 to 230	40 dB (µV/m) quasi peak, measured at 10m distance	EN 55011 / CISPR 11 Group 1 Class A
230 to 1000	47 dB (µV/m) quasi peak, measured at 10m distance	

#### Immunity requirements :

EN 61326-1 : 2006 (Table 2)

Phenomenon	Test value	Basic standard	Performance criteria
Electrostatic discharge	4 kV (Contact) 8 kV (Air)	EN 61000-4-2 IEC 61000-4-2	<b>B</b>
Electromagnetic field	10V/m (80 to 1000 MHz) 3 V/m (1.4 to 2.0 GHz) 1 V/m (2.0 to 2.7 GHz)	EN 61000-4-3 IEC 61000-4-3	<b>A</b>
Rated power frequency magnetic field	30 A/m	EN 61000-4-8 IEC 61000-4-8	<b>A</b>
Burst	2 kV (5/50 NS, 5 kHz)	EN 61000-4-4 IEC 61000-4-4	<b>B</b>
Surge	1 kV Line to line 2 kV Line to ligne	EN 61000-4-5 IEC61000-4-5	<b>B</b>
Conducted RF	3 V (150 kHz to 80 MHz)	EN 61000-4-6 IEC61000-4-6	<b>A</b>

#### Performance criteria :

**A** : During testing, normal performance within the specification limits.

**B** : During testing, temporary degradation or loss of function or performance which is self-recovering.

## Fuji Electric France S.A.S.

46, Rue Georges Besse - Z I du Brézet

63 039 Clermont-Ferrand cedex 2 — FRANCE

France : Tél. 04 73 98 26 98 - Fax 04 73 98 26 99

International : Tél. (33) 4 7398 2698 - Fax. (33) 4 7398 2699

E-mail : sales.dpt@fujielectric.fr