
A Badger Meter® Brand

FilterSmart

Controller

DIMENSIONAL DRAWING

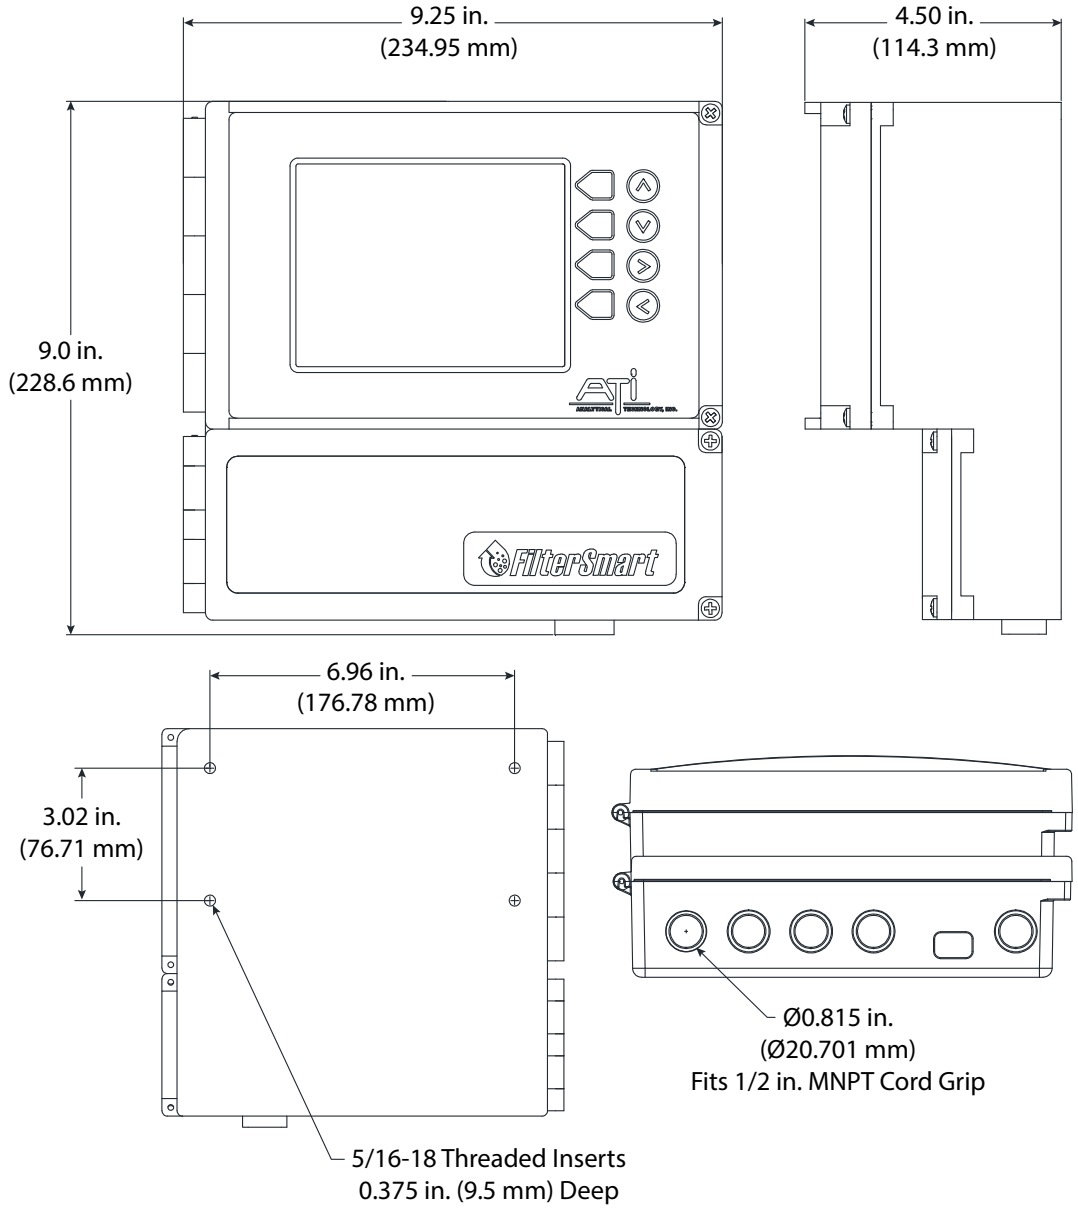

⚠CAUTION


USE CAUTION WHEN REMOVING THE KNOCKOUTS ON THE ENCLOSURE. A SMALL BLADED SCREWDRIVER TAPPED FIRMLY INTO THE KNOCKOUT RECESS IS ALL THAT IS NECESSARY. DO NOT DRIVE THE SCREWDRIVER BACK INTO THE ENCLOSURE OR IT MAY STRIKE THE CIRCUIT BOARD AND CAUSE COMPONENT DAMAGE.


Badger Meter

ATI-GX-04428-EN-02 (July 2024)

Support Drawings


ELECTRICAL CONNECTIONS

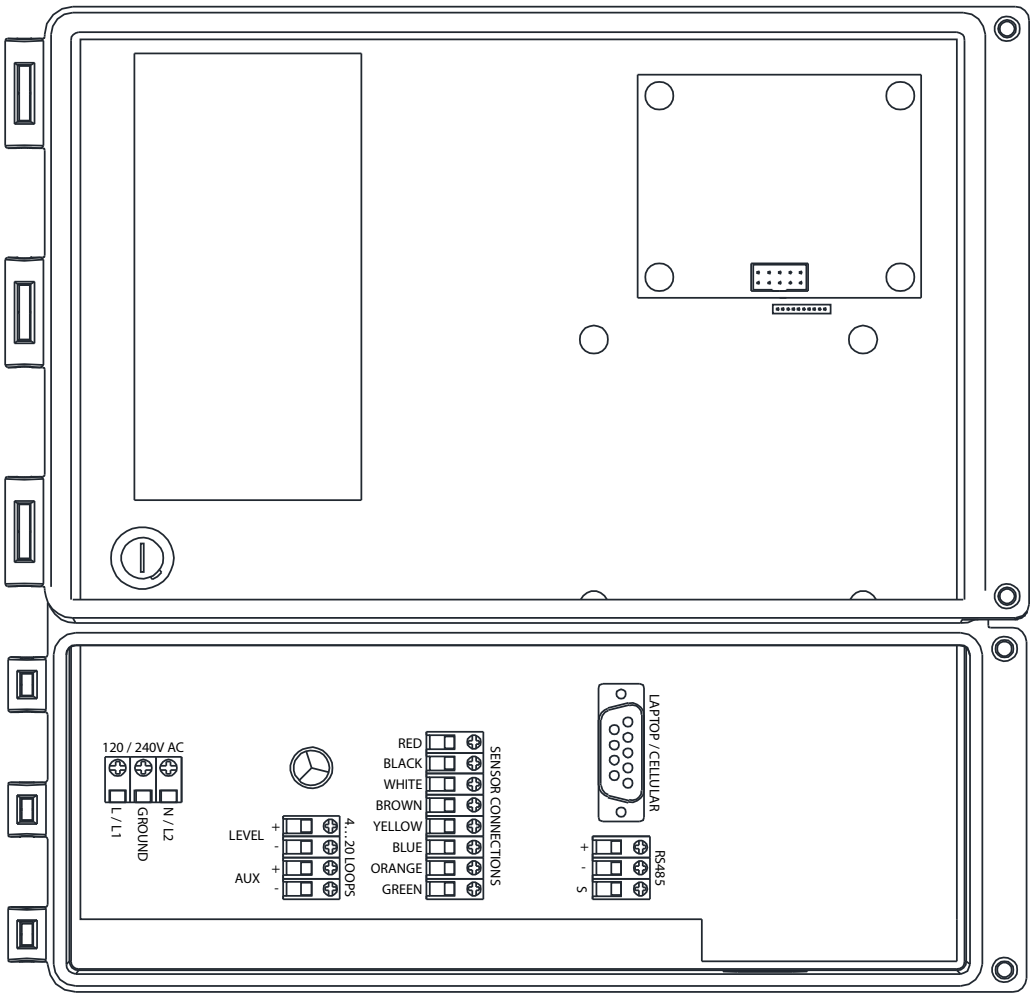

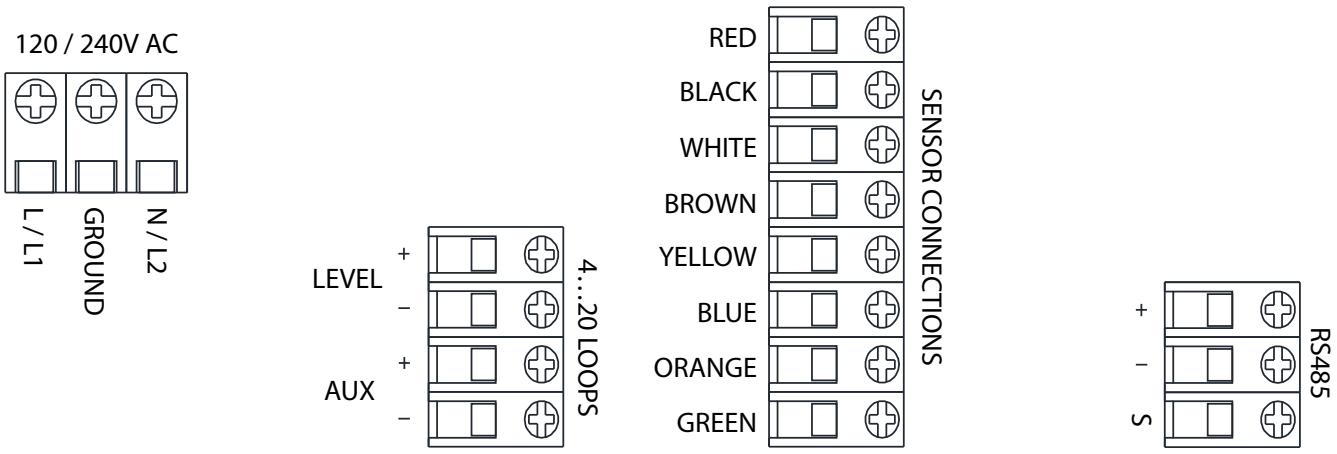


CONFIGURATION OPTIONS


Optional 12V CD Power, Optional Internal RF and Optional Relays

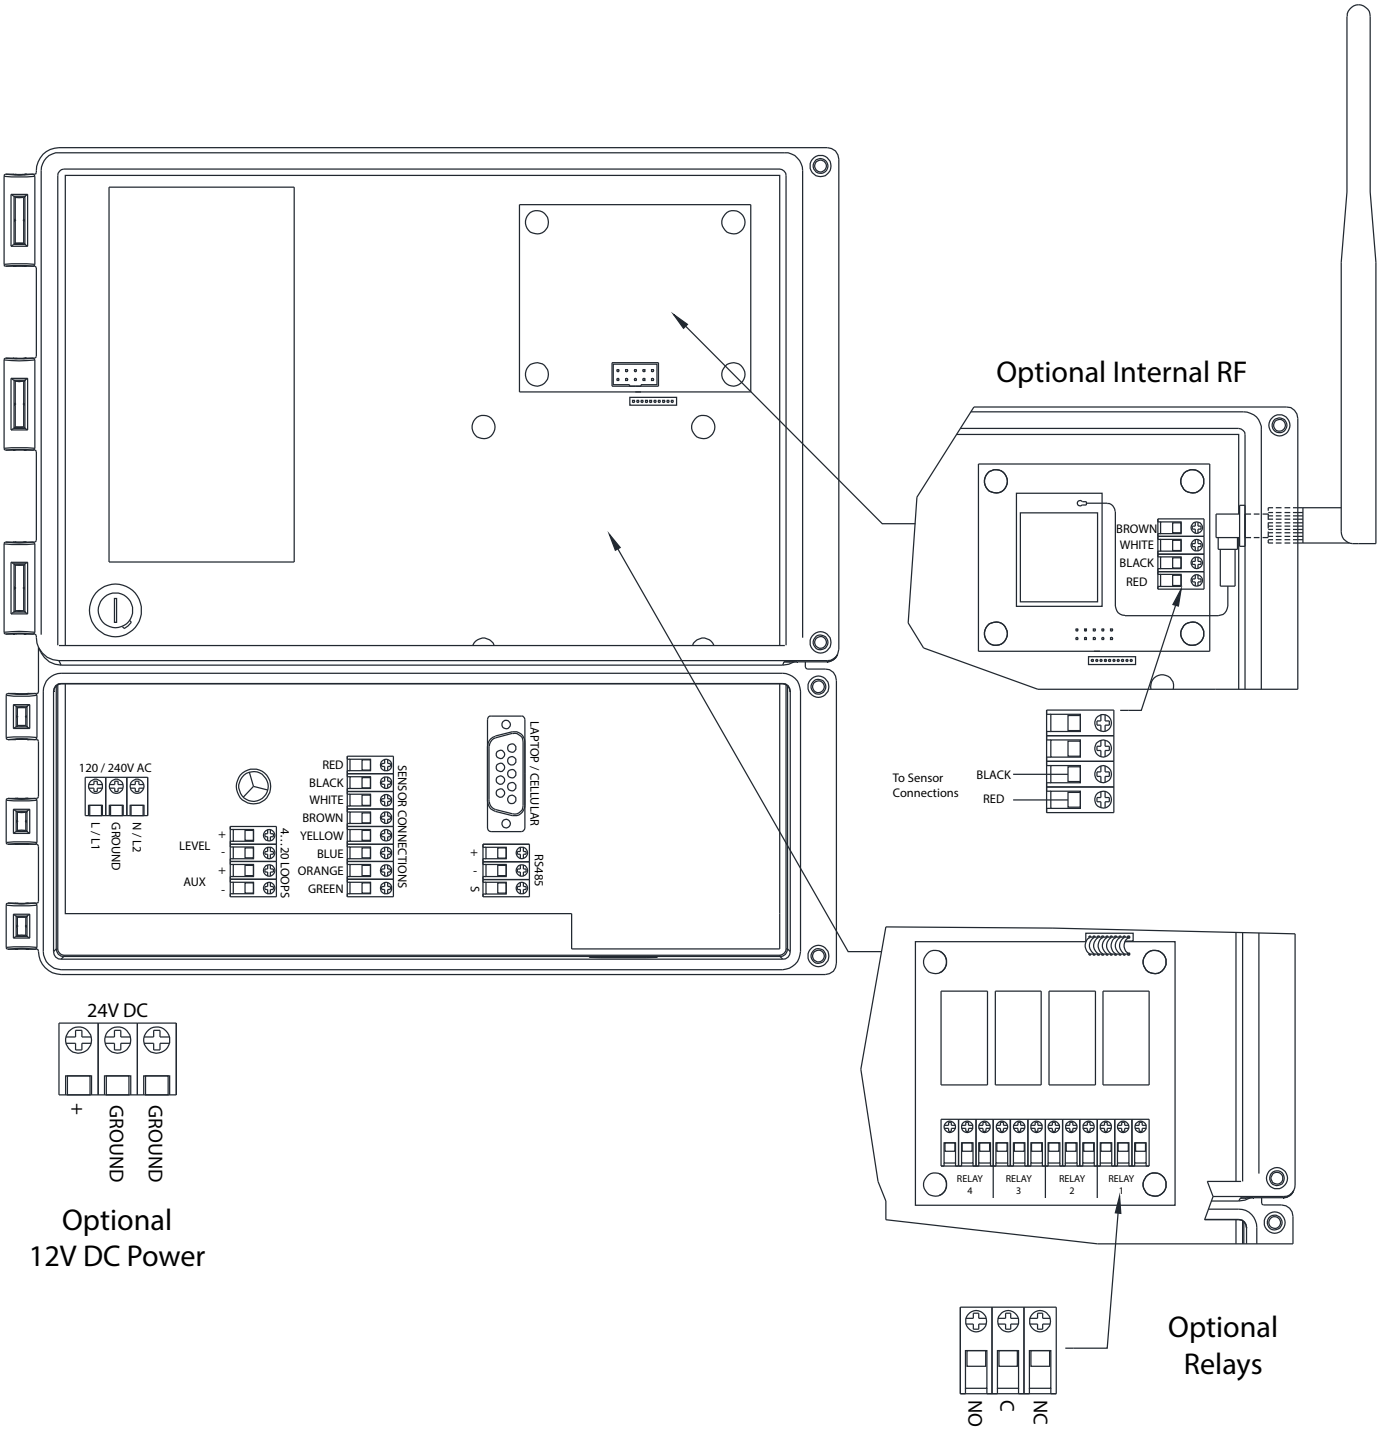

CONFIGURATION OPTIONS

Optional External RF

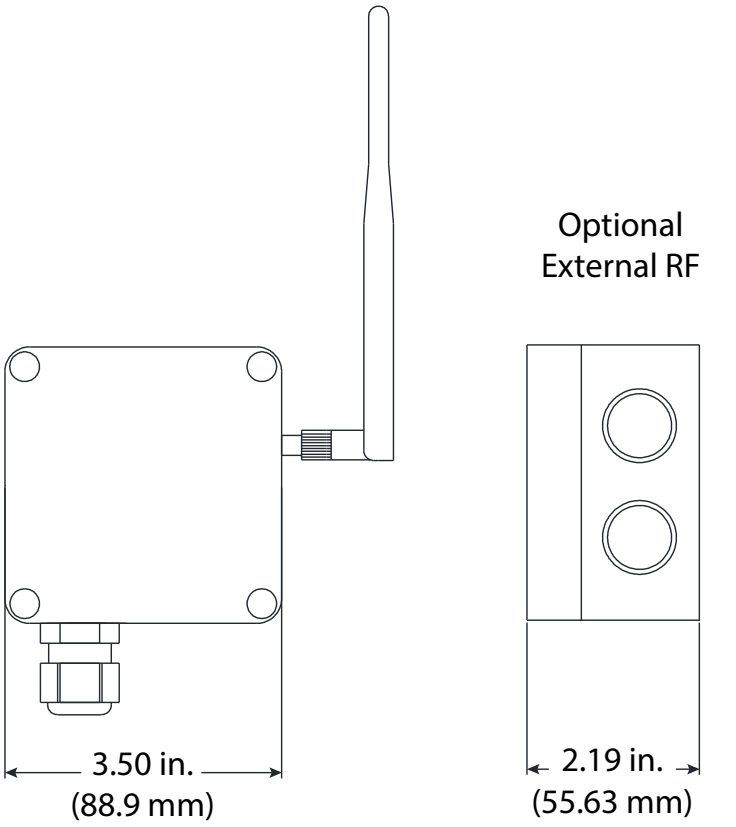

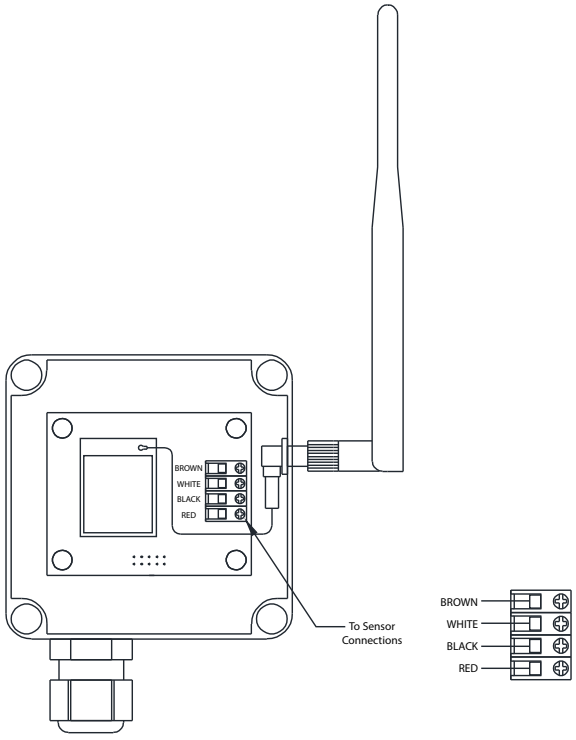

FILTERSMART CONTROLLER CONFIGURATIONS

North America

	Power		Network Options			Options
Part No.	115 / 230V AC	24V DC	Wired	Internal RF	External RF *	4 Relays
00-1932	•		•			
00-1982	•			•		
00-1983	•				•	
00-1984	•		•			•
00-1985	•			•		•
00-1986	•				•	•
00-1933		•	•			
00-1987		•		•		
00-1988		•			•	
00-1989		•	•			•
00-1990		•		•		•
00-1991		•			•	•

* Cable length between enclosures must be specified.

Europe

	Power		Network Options			Options
Part No.	115 / 230V AC	24V DC	Wired	Internal RF	External RF *	4 Relays
00-1932	•		•			
00-2093	•			•		
00-2094	•				•	
00-1984	•		•			•
00-2095	•			•		•
00-2096	•				•	•
00-1933		•	•			
00-2097		•		•		
00-2098		•			•	
00-1989		•	•			•
00-2099		•		•		•
00-2100		•			•	•

* Cable length between enclosures must be specified.

INTENTIONAL BLANK PAGE

INTENTIONAL BLANK PAGE

SMART WATER IS *BADGER METER*

Trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2024 Badger Meter, Inc. All rights reserved.

www.badgermeter.com